


Data Sheet

Type Number:	6231
Designation IEC:	---
System:	Li-Manganese dioxide / Organic Electrolyte
UL Recognition:	pending
Nominal Voltage [V]:	6
Typical Capacity C [mAh]:	170
Load 13 kOhm, at 20 °C down to 4.0 V	
Weight, approx [g]:	8,8
Volume [ccm]:	3,1
Coding:	Manufacturing Quater/Year by Letter Code
Temperature Ranges [°C]:	min. max.
Storage:	-55 70
Discharge:	-20 65
Dimensions [mm]:	min. max.
Diameter [A]:	12,8 13
Height [B]:	24,4 25,1
Shoulder Diameter[L]:	5,5
Shoulder Height [M]:	1,1
Segment:	Electronic
Main Applications:	Photo Electronic

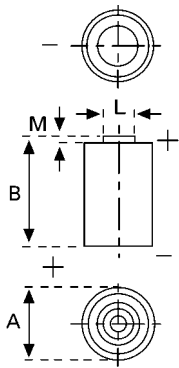

Typical Capacities (at 20° C):

Discharge Type:	Load	End Voltage:	4.0 V
Continuous	13000 Ω	Time:	395 h
24h/d, 7d/w		Capacity [mAh]:	170
Current [μA]:		Energy [mWh]:	945