


ENERGIZER L92

AAA



Industry Standard Dimensions

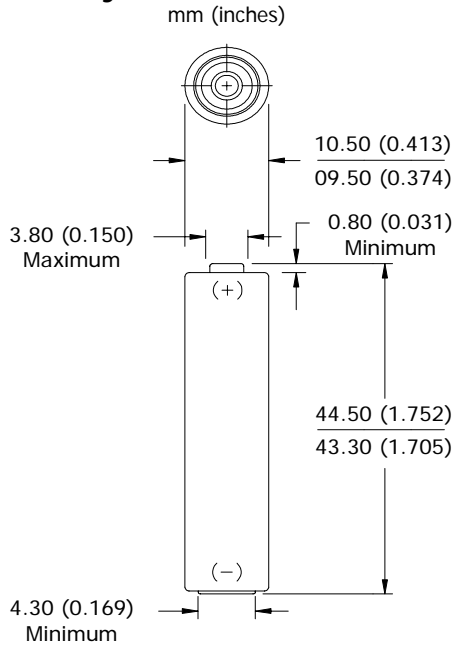

This battery has Underwriters Laboratories component recognition (MH29980)


Specifications

Classification: "Cylindrical Lithium"
Chemical System: Lithium/Iron Disulfide (Li/FeS₂)
Designation: ANSI 24-LF, IEC-FR03
Nominal Voltage: 1.5 Volts
Typical Weight: 7.6 grams (0.3 oz.)
Typical Volume: 3.8 cubic centimeters (0.2 cubic inch)
Max Discharge: 1.5 Amps Continuous
 2.0 Amps Pulse (2 sec on / 8 sec off)
Typical Li Content: 0.5 grams (0.02 oz.)
Typical IR: 90 to 150 milliohms*
Shelf Life: 15 years at 21°C (90% of rated capacity)
Transportation: For complete details, please reference:
 Global (except US): Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations
 United States: 49 CFR 173.185

* For additional information, please reference the IR technical white paper.

Milliamp-Hours Capacity

Constant Current Discharge to 0.9 Volts at 21°C

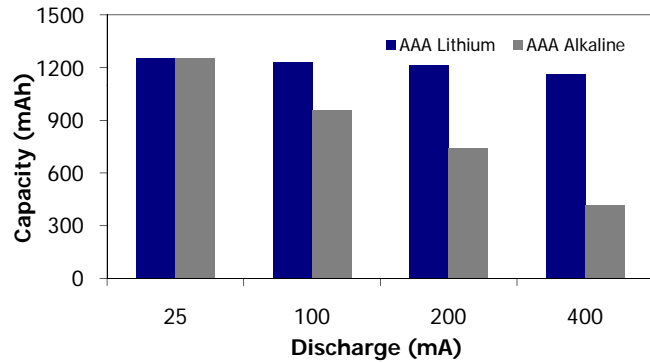


Milliwatt-Hours Capacity at Cold/Room Temperature

Constant Power Discharge to 1.0 Volts at 0°C and 21°C
 Recommended Lithium Operating/Storage Temperature: -40°C to 60°C


Cold Temperature (0°C)

Constant Power Discharge

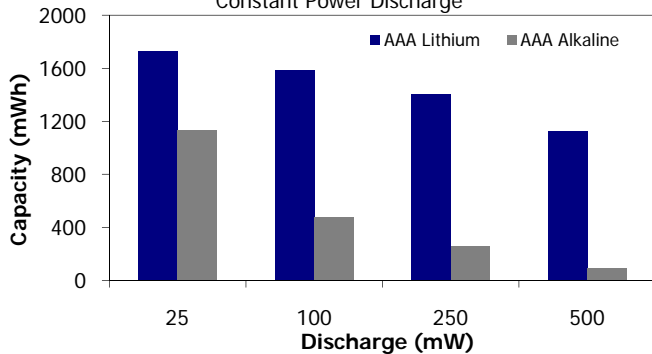

Room Temperature (21°C)

Constant Power Discharge

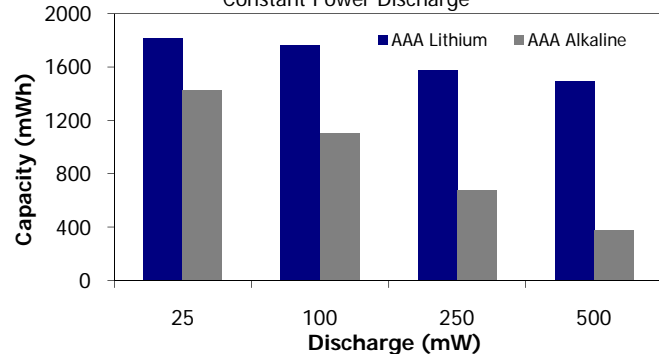

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
 ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.


ENERGIZER L92

AAA


Typical Discharge Curve Characteristics

Constant Current Discharge at 21°C (low and high drains)

Low Drain Performance
50mA Continuous (21°C)

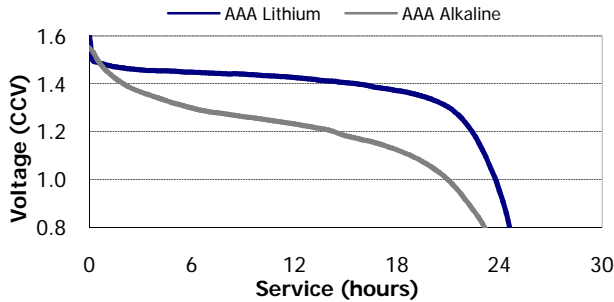


High Drain Performance
600mA Continuous (21°C)

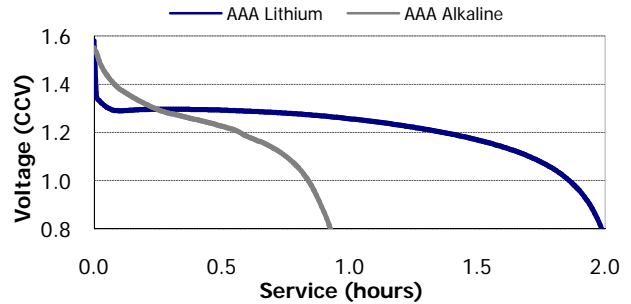


Constant Power Performance

Typical Characteristics to 1.0 Volts (21°C)

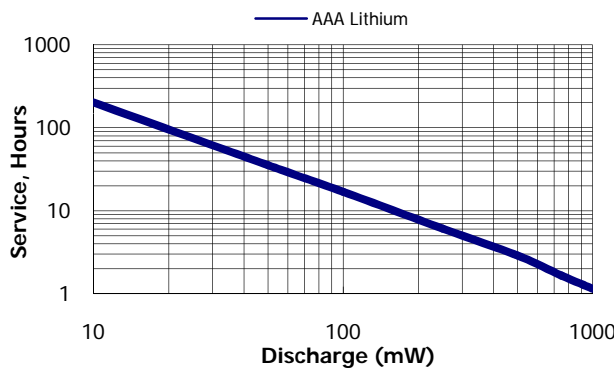


Constant Current Performance

Typical Characteristics to 1.0 Volts (21°C)

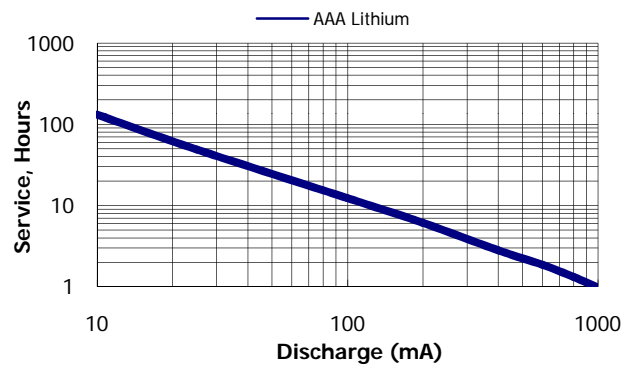


Industry Standard Tests (21°C)


REMOTE
24 ohm 15 sec/min 8 hrs/day

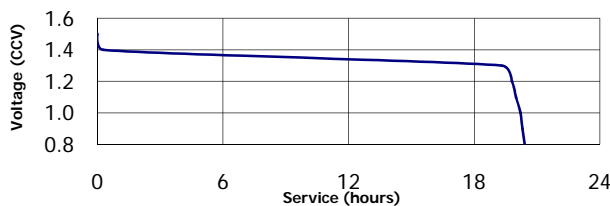


TAPE / ELECTRONIC GAME / DIGITAL AUDIO
100 mA 1 hr/day

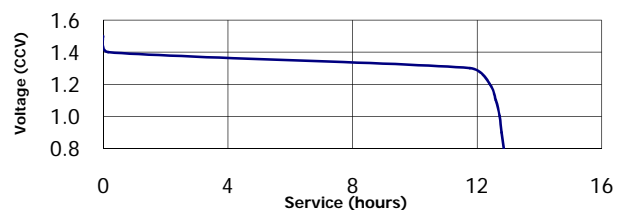

PORTABLE LIGHTING
5.1 ohm LIF

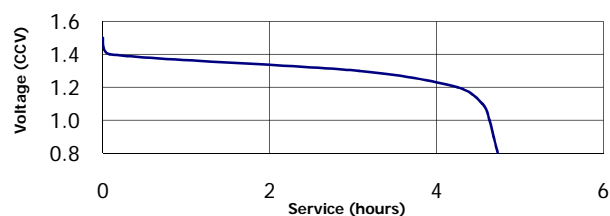

PHOTOFLASH
600 mA 10 sec/min 1 hr/day

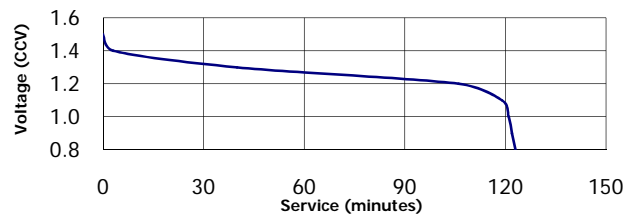

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.