


# Kodak Lithium Battery

## K58L


Effective : March 2005

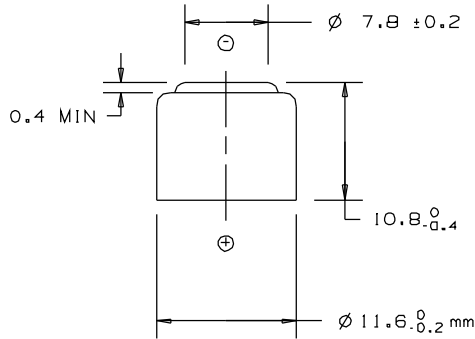


System:	Lithium/Manganese Dioxide, Li/MnO <sub>2</sub>
Designation:	ANSI 5008LC, IEC CR11108
Nominal Voltage:	3.0 Volts
Capacity:	160 mAh at 2.0 mA
Maximum Discharge:	60 mA Continuous, 80 mA Pulse
Maximum Reversal Current:	2 mA
Temperature Range:	-40°C to 65°C Operating -20°C to 45°C Storage
Average Weight:	3.4 grams
Volume:	1.13 cm <sup>3</sup>
Terminals:	Flat Contacts
Jacket:	None
Lithium Content:	<0.5 grams/Battery
Shelf Life:	10 years to 80% of original capacity.

NOTE: 1) This battery complies with ANSI C18, IEC 60086, & EEC directive 91/157 standards.


### Typical Discharge Characteristics K58L

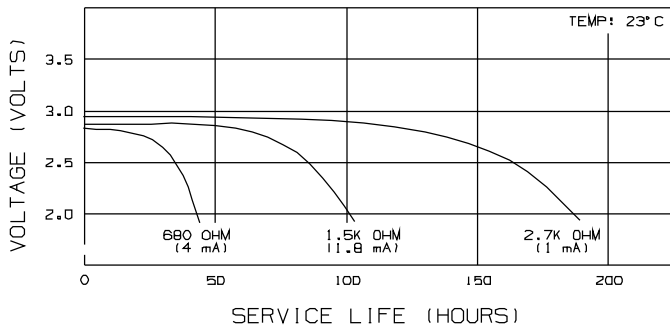


### Typical Temperature Characteristics K58L

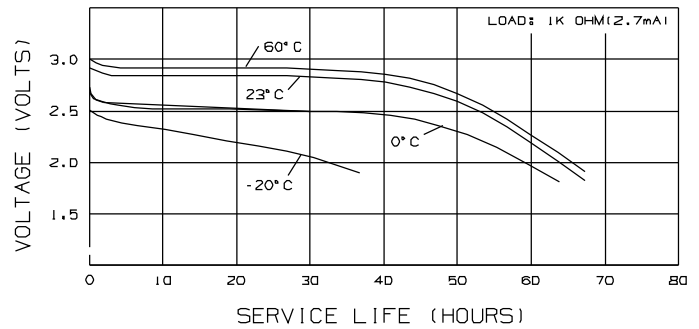

### Typical Cell Capacity K58L

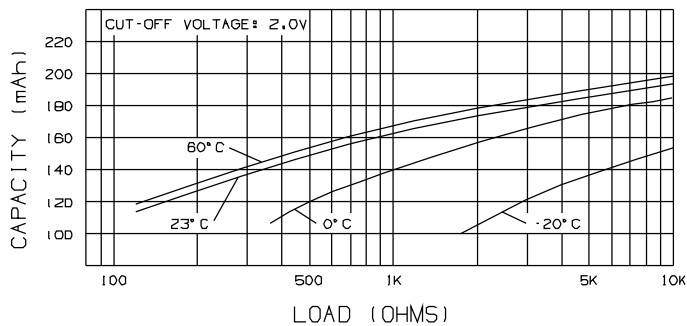

### Typical Temperature Characteristics K58L

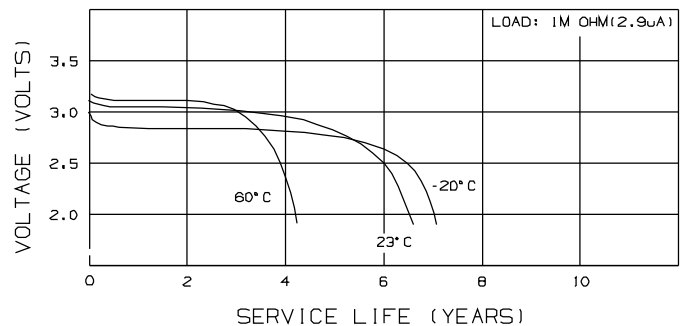

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact  
 EASTMAN KODAK COMPANY  
 343 State Street  
 Rochester, New York 14650-0811  
 1-800-242-2424  
[www.kodak.com/go/batteries](http://www.kodak.com/go/batteries)